

SP.138 – HERMETIC™ Paramount Submittal Package

Revised: 04/05/2022 Version: 1.1

Page 1 of 9

Summary of available HERMETIC™ Paramount Flooring Systems

HERMETIC™ Paramount Flooring is available in the following systems engineered for a variety of specialty applications.

1) PAR-620 (Epoxy Slurry Flooring System)

A resinous flooring system that incorporates a slurry coat of epoxy and aggregate, with additional broadcast options available.

2) PHD-621 (Epoxy Mortar Flooring System)

A trowel applied resinous mortar flooring system that incorporates epoxy and aggregate.

Contact a local Elite Crete Systems representative for additional help selecting the appropriate flooring system for your needs.

Table of Contents

- 1. Submittal Overview**
 - 1.1. Features
 - 1.2. Uses
 - 1.3. Physical Properties
 - 1.4. Surface Preparation
- 2. Products**
 - 2.1. Primer Coat Product Options
 - 2.2. Slurry/Mortar Coat Product Options
 - 2.3. Broadcast Media Options (Paramount Only)
 - 2.4. Body/Grout Coat Product Options
 - 2.5. Protective Top Coat Product Options
- 3. Reference Model**
 - 3.1. HERMETIC™ Paramount 3D Floor Model
- 4. Color Chart**
 - 4.1. HERMETIC™ Paramount Color Chart
 - 4.2. HERMETIC™ Quartz Color Chart
- 5. Maintenance**
 - 5.1. General Maintenance
- 6. Additional Application Options**
 - 6.1. Cove Base
 - 6.2. Wall Coating

SP.138 – HERMETIC™ Paramount Submittal Package

Revised: 04/05/2022 Version: 1.1

Page 2 of 9

1. SUBMITTAL OVERVIEW

The HERMETIC™ Paramount Flooring Systems are high build, self-leveling, resinous slurry/mortar systems engineered for industrial applications. Available in either a solid pigment or colored quartz for a decorative finish, offering a smooth or non-slip surface for a variety of needs.

1.1 – FEATURES:

- Ease of maintenance
- Aesthetic improvements
- Increases the strength of the substrate
- Hard and abrasion resistant
- VOC free – CA 01350 air quality compliant
- Stain and chemical resistant
- Fast set available for quicker turnaround time
- Meets or exceeds ADA, USDA & NFPA 'COF' requirements

1.2 – USES:

- Warehouses
- Manufacturing areas
- Laboratories & clean rooms
- Specialty food & beverage facilities
- Breweries & wineries
- Automotive service areas & garages
- Fire, rescue & EMS
- Marijuana dispensary, grow & retail
- Hospitals
- Schools
- Airports
- Shopping malls
- Concrete floor restoration

1.3 – Physical Properties

Testing results for each flooring system will vary depending on the individual components chosen to meet the specific project requirements. Performance testing results are available by contacting a technical representative, or by visiting www.elitecrete.com/technical-data/

1.4 – Surface Preparation

Contact your local Elite Crete Systems technical representative for information regarding project-specific preparation and recommended testing.

2. PRODUCTS

The following products are intended to be used as part of a complete flooring system and not to be used as standalone products.

2.1 – Primer Coat Product Options

The products listed in this section can be used for a primer coat. The product being used should be selected based on substrate porosity and in situ relative humidity test results. The primer coat (as pertains to this document only) references the product that is applied directly to a properly prepared concrete substrate.

A) E100-VB5™ – EPOXY VAPOR BARRIER

E100-VB5™ Epoxy Vapor Barrier is a high-solids, low viscosity, two-component epoxy primer system designed to reduce or eliminate out gassing bubbles in concrete and seal out water penetration.

SP.138 – HERMETIC™ Paramount Submittal Package

Revised: 04/05/2022 Version: 1.1

Page 3 of 9

Excellent impact resistance, chemical resistance, and superior substrate penetration. Outperforms solvent-based sealers and primers.

Other options may be available for unique substrate conditions. Consult with a local regional manufacturer representative for information about additional options.

2.2 – Slurry/Mortar Coat Product Options

The products listed in this section can be used for a base coat. The product being used should be selected based on the chosen system and the performance requirements of the project. The base coat (as pertains to this document only) references the first application of epoxy.

A) E100-PT4™ Standard or FAST

E100-PT4™ Pigmented Epoxy is a 100% solid, pigmented, non-shrink, two-component epoxy base and top coat system designed for a wide variety of applications. Will not blush or water spot and exhibits excellent physical and chemical resistant properties. This product is available as a standard set with 8-10 hour cure time, or FAST set with 4-6 hour cure time (at 72F/22C).

B) E100-VR4™

E100-VR4™ Pigmented Epoxy is a 100% solid, pigmented, non-shrink, two-component epoxy base and top coat system designed for a wide variety of applications. Will not blush, discolor, or water spot and exhibits excellent physical and chemical resistant properties. E100-VR4™ is specifically designed for incidental interior UV exposure.

C) E100-UL7™

E100-UL7™ is a two-component, 100% solids, underlayment epoxy floor coating for commercial and industrial use. E100-UL7™ is a clear epoxy resin designed for use as a cost-effective base coat for broadcast flooring, sealing concrete, binder for epoxy mortars, and crack treatment adhesive. Available in clear only or can be pigmented in the field with special powdered or liquid pigment.

D) E100-PT1™ Standard or FAST

E100-PT1™ Clear Epoxy is 100% solids, low viscosity, water-clear, non-shrink, two-component epoxy designed for a wide variety of applications. E100-PT1™ Clear Epoxy will not blush or water spot and has excellent physical and chemical resistant properties. E100-PT1™ Clear Epoxy is available in standard and fast set formulas. This product is available as a standard set with 7-8 hour cure time, or FAST set with 3-4 hour cure time (at 73F/23C).

E) E100-UV1™ Standard or FAST

E100-UV1™ Clear Epoxy is 100% solids, medium viscosity, water clear, non-shrink, two-component epoxy coating, designed for a wide variety of applications. E100-UV1™ Clear Epoxy will not blush or water spot and has excellent physical and chemical resistant properties.

SP.138 – HERMETIC™ Paramount Submittal Package

Revised: 04/05/2022 Version: 1.1

Page 4 of 9

F) E100-VR1™

E100-VR1™ is 100% solids, UV resistant, low viscosity, clear, high gloss, two-component epoxy coating, specifically designed for incidental interior exposure to UV attack. Bonds to slightly damp concrete and is not affected by high humidity. Resistant to microbial growth.

G) E100-NV4™ / E100-NV5™

E100-NV4™ / E100-NV5™ Novolac Protective Coatings are highly chemical resistant coatings for splash and spills or full immersion service subjected to corrosive reagents such as 98% sulfuric acid, nitric acid, and most bases and solvents. Excellent for most flooring, wall, and equipment coating applications where chemical resistance is required. Refer to TD.400 for more specific chemical resistance information.

2.3 – Broadcast Media Options (Paramount Only)

The products listed in this section can be used for a base coat. The product being used should be selected based on the chosen system and the performance requirements of the project. The base coat (as pertains to this document only) references the product that the silica quartz media is broadcast into.

A) Colored Quartz Media

Specially formulated quartz aggregates used to enhance the aesthetic and ergonomic qualities of resinous performance flooring and wall coating systems. Colored quartz media is available in a wide range of colors, sizes, styles and blends to meet your design needs.

B) Silica Quartz Media

Specially formulated quartz aggregates used to enhance the aesthetic and ergonomic qualities of resinous performance flooring and wall coating systems. Silica quartz media is available in a wide range of sizes, styles and blends to meet your design needs.

2.4 – Body/Grout Coat Product Options

The products listed in this section can be used for a body coat. The product being used should be selected based on the chosen system and the performance requirements of the project. The body coat (as pertains to this document only) references the second application of epoxy.

A) E100-PT4™ Standard or FAST

E100-PT4™ Pigmented Epoxy is a 100% solid, pigmented, non-shrink, two-component epoxy base and top coat system designed for a wide variety of applications. Will not blush or water spot and exhibits excellent physical and chemical resistant properties. This product is available as a standard set with 8-10 hour cure time, or FAST set with 4-6 hour cure time (at 72F/22C).

B) E100-VR4™

E100-VR4™ Pigmented Epoxy is a 100% solid, pigmented, non-shrink, two-component epoxy base and top coat system designed for a wide variety of applications. Will not blush, discolor, or water spot and

SP.138 – HERMETIC™ Paramount Submittal Package

Revised: 04/05/2022 Version: 1.1

Page 5 of 9

exhibits excellent physical and chemical resistant properties. E100-VR4™ is specifically designed for incidental interior UV exposure.

C) E100-UL7™

E100-UL7™ is a two-component, 100% solids, underlayment epoxy floor coating for commercial and industrial use. E100-UL7™ is a clear epoxy resin designed for use as a cost-effective base coat for broadcast flooring, sealing concrete, binder for epoxy mortars, and crack treatment adhesive.

Available in clear only or can be pigmented in the field with special powdered or liquid pigment.

D) E100-PT1™ Standard or FAST

E100-PT1™ Clear Epoxy is 100% solids, low viscosity, water-clear, non-shrink, two-component epoxy designed for a wide variety of applications. E100-PT1™ Clear Epoxy will not blush or water spot and has excellent physical and chemical resistant properties. E100-PT1™ Clear Epoxy is available in standard and fast set formulas. This product is available as a standard set with 7-8 hour cure time, or FAST set with 3-4 hour cure time (at 73F/23C).

E) E100-UV1™ Standard or FAST

E100-UV1™ Clear Epoxy is 100% solids, medium viscosity, water clear, non-shrink, two-component epoxy coating, designed for a wide variety of applications. E100-UV1™ Clear Epoxy will not blush or water spot and has excellent physical and chemical resistant properties.

F) E100-VR1™

E100-VR1™ is 100% solids, UV resistant, low viscosity, clear, high gloss, two-component epoxy coating, specifically designed for incidental interior exposure to UV attack. Bonds to slightly damp concrete and is not affected by high humidity. Resistant to microbial growth.

G) E100-NV4™ / E100-NV5™

E100-NV4™ / E100-NV5™ Novolac Protective Coatings are highly chemical resistant coatings for splash and spills or full immersion service subjected to corrosive reagents such as 98% sulfuric acid, nitric acid, and most bases and solvents. Excellent for most flooring, wall, and equipment coating applications where chemical resistance is required. Refer to TD.400 for more specific chemical resistance information.

H) SPARTIC-ALL™ RM

SPARTIC-ALL™ RM is a high solid, water clear, non-shrink, two-component polyaspartic ester floor coating. Used for a multitude of applications. Exhibits a higher abrasion resistance and stain resistance as compared to most epoxy coatings. SPARTIC-ALL™ RM is UV resistant and has long-term durability to constant traffic.

2.5 – Protective Top Coat Product Options

The products listed in this section can be used for a protective top coat. The product being used should be selected based on the chosen system and the performance requirements of the project. The protective

SP.138 – HERMETIC™ Paramount Submittal Package

Revised: 04/05/2022 Version: 1.1

Page 6 of 9

top coat (as pertains to this document only) references the final coating that goes over the base/body coat.

A) AUS-V™ (Used only with E100 products)

AUS-V™ is a high quality, extremely durable, clear, two component, protective urethane coating for epoxy coatings such as the E100™ Series Epoxies, the HERMETIC™ Paramount Flooring Systems and the HERMETIC™ Flooring Systems.


B) SPARTIC-ALL™ RM

SPARTIC-ALL™ RM is a high solid, water clear, non-shrink, two-component polyaspartic ester floor coating. Used for a multitude of applications. Exhibits a higher abrasion resistance and stain resistance as compared to most epoxy coatings. SPARTIC-ALL™ RM is UV resistant and has long-term durability to constant traffic.

Other options may be available for unique project requirements. Consult with a local regional manufacturer representative for information about additional options.

3. REFERENCE MODEL

3.1 – HERMETIC™ Paramount 3D Floor Model

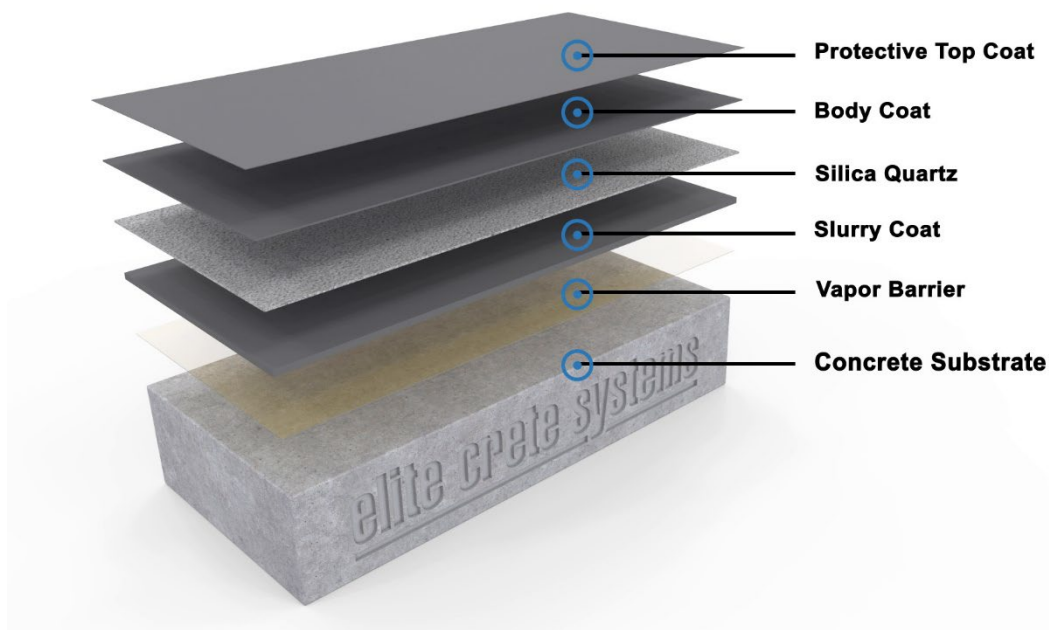

Reference models are for illustration purposes only and do not depict all available options.


SP.138 – HERMETIC™ Paramount Submittal Package

Revised: 04/05/2022 Version: 1.1

Page 7 of 9

4. COLOR CHART

4.1 – HERMETIC™ Paramount Color Chart

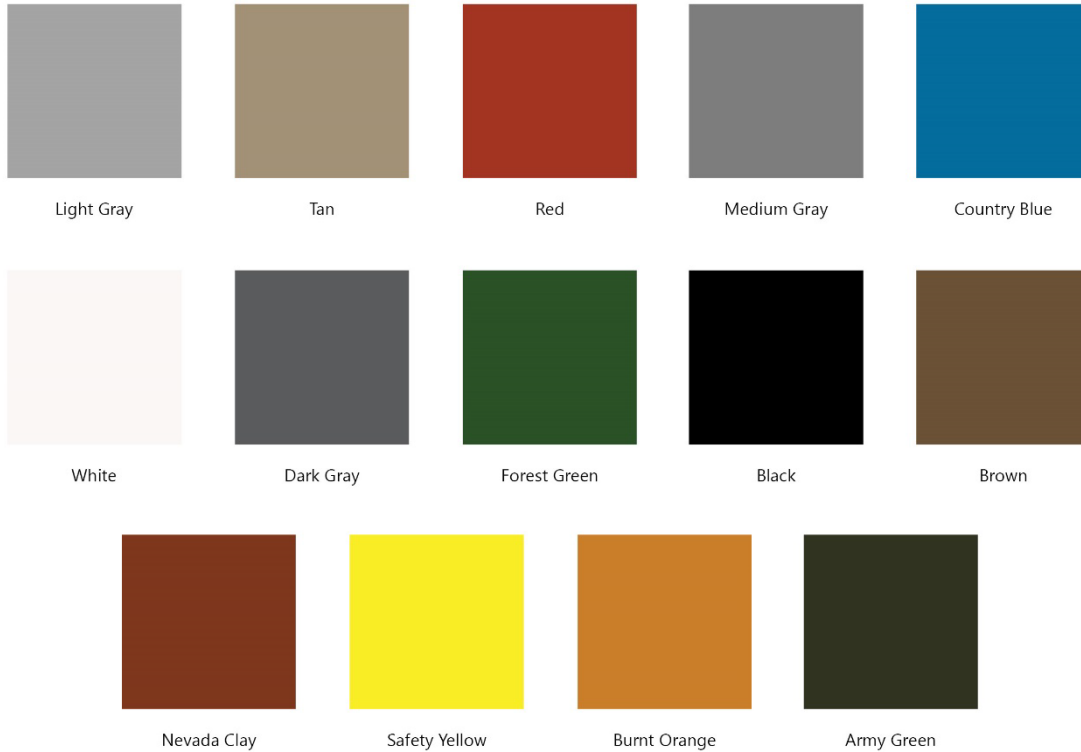

For additional information, visit: elitecrete.com

Note: The colors on this chart are represented as closely as possible. Variations should be expected due to differences in; substrate condition thickness of application, speed of curing, blending of colors, application method and color of initial primer coat. For additional information, see all related Product Information and Technical Data sheets located at elitecrete.com.

SP.138 – HERMETIC™ Paramount Submittal Package

Revised: 04/05/2022 Version: 1.1

Page 8 of 9


4.2 – HERMETIC™ Quartz Color Chart




Fossil
(QB-1009)



Granite
(QB-1008)



Topaz
(QB-1018)



Sapphire
(QB-1019)



Pewter
(QB-1001)



Limestone
(QB-1006)



Dune
(QB-1003)



Cobblestone
(QB-1004)



Garnet
(QB-1025)



Sunset
(QB-1023)



Beach
(QB-1014)



Caribbean
(QB-1012)

Note: The colors on this chart are represented as closely as possible. Variations should be expected due to differences in; substrate condition thickness of application, speed of curing, blending of colors, application method and color of initial primer coat. For additional information, see all related Product Information and Technical Data sheets located at elitecrete.com.

SP.138 – HERMETIC™ Paramount Submittal Package

Revised: 04/05/2022 Version: 1.1

Page 9 of 9

5. MAINTENANCE

5.1 – General Maintenance

If general care is provided and recommended guidelines observed, the decorative appearance and life of all resinous flooring will be extended.

REFER TO DOCUMENT PI.605 FOR ADDITIONAL CARE AND MAINTENENCE INSTRUCTIONS

6. ADDITIONAL APPLICATION OPTIONS

6.1 – Cove Base

E100-PTG™ Cove Base Resin Gel is a 100% solids, thixotropic clear resin designed for use on vertical applications. (For more information, see document: TD.525 - E100-PTG™)

6.2 – Wall Coating

HERMETIC™ CVP Ceramic Wall Coating is a 100% solids, high gloss vertical finish with superior abrasion and chemical resistance. (For more information, see document: TD.767 - HERMETIC™ CVP)

Contact your local Elite Crete Systems technical representative for more information about additional applications options.

